


修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2015-06-07

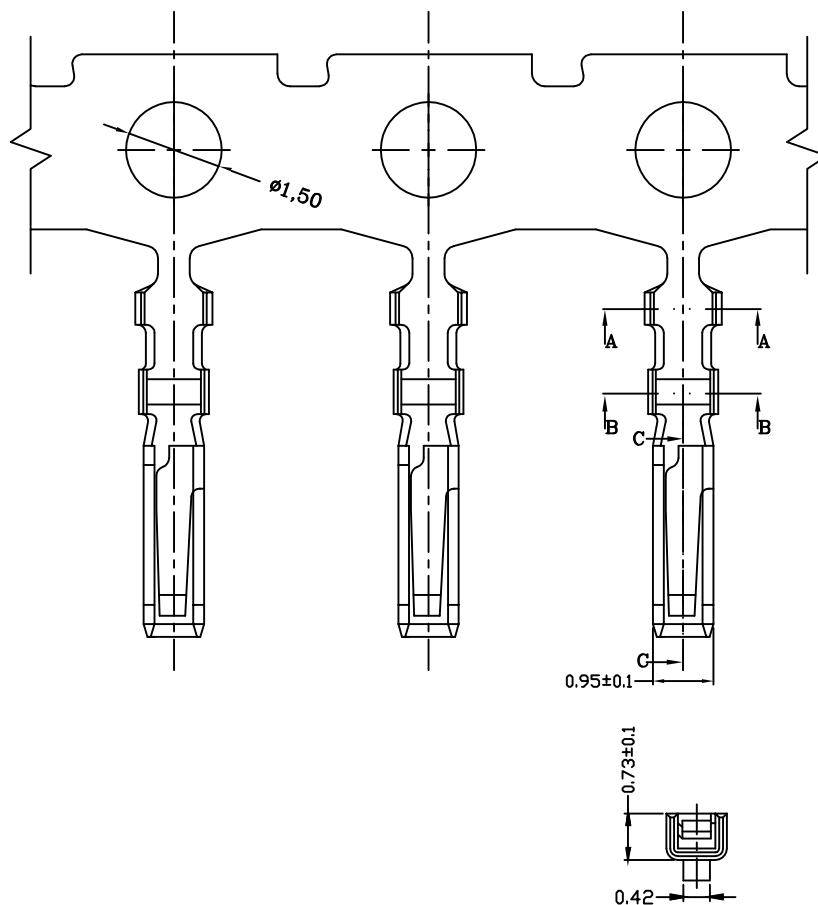


Ordering information & Specifications





Part No	Wire Range	Insultion O.D.	Material	Finish	Qty/reel
HDGC1254-TP	AWG#28-#32	0.90mm(max)	Phosphor Bronze	Tin over Nickel	20,000 PCS
HDGC1254-GP	AWG#28-#32	0.90mm(max)	Phosphor Bronze	Gold over Nickel	20,000 PCS

Optional Gold plating available but MOQ requested

Unit:mm

 深圳市华德共创科技有限公司 Shenzhen Huade co-create Technology Co.,LTD TEL : 0755-27129737 FAX : 0755-29940187									
-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表						TITLE: 1.25mm Pitch 产品名称: Crimp Terminal			
X.X	±0.30	X.X°	±3°	APPD: 核准: XIE		PART NO: 产品编号: HDGC1254-T			
X.XX	±0.30	X.XX°	±2°	CHECK: 校对: WANG		DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图: WANG		2015-06-07	1:1	mm	A001

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2015-06-07

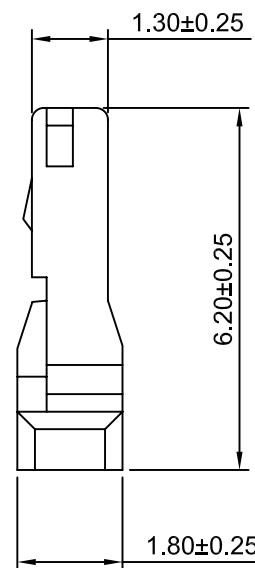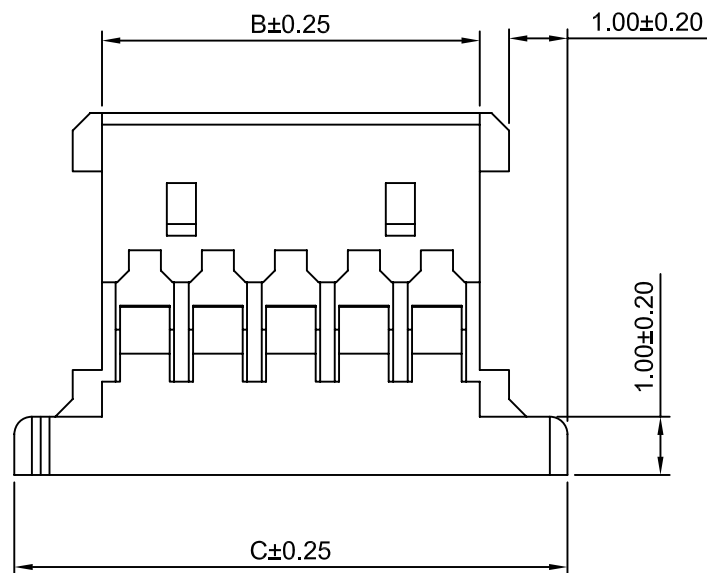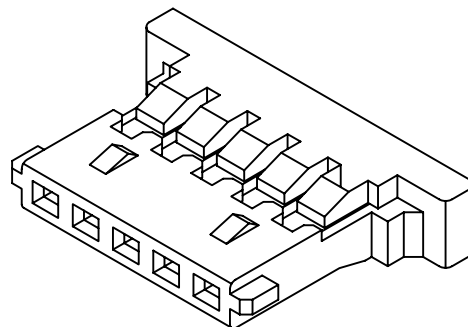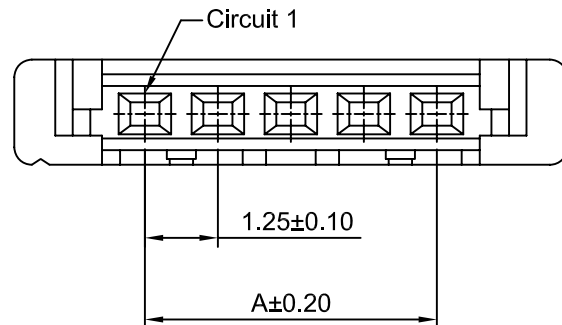

Ordering Information & Dimensions

Circuits	Dimensions(mm)			Circuits	Dimensions(mm)		
	A	B	C		A	B	C
2P	1.25	2.72	5.72	17P	20.00	21.47	24.47
3P	2.50	3.97	6.97	18P	21.25	22.72	25.72
4P	3.75	5.22	8.22	19P	22.50	23.97	26.97
5P	5.00	6.47	9.47	20P	23.75	25.22	28.22
6P	6.25	7.72	10.72	21P	25.00	26.47	29.47
7P	7.50	8.97	11.97	22P	26.25	27.72	30.72
8P	8.75	10.22	13.22	23P	27.50	28.97	31.97
9P	10.00	11.47	14.47	24P	28.75	30.22	33.22
10P	11.25	12.72	15.72	25P	30.00	31.47	34.47
11P	12.50	13.97	16.97	26P	31.25	32.72	35.72
12P	13.75	15.22	18.22	27P	32.50	33.97	36.97
13P	15.00	16.47	19.47	28P	33.75	35.22	38.22
14P	16.25	17.72	20.72	29P	35.00	36.47	39.47
15P	17.50	18.97	21.97	30P	36.25	37.72	40.72
16P	18.75	20.22	23.22				

SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Material: Nylon 66,UL94V-0(Beige)




深圳市华德共创科技有限公司

Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 产品名称: 1.25mm Pitch Housing	
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG
				PART NO: 产品编号:	HDGC1254H-XP
				DATE	SCALE
				UNIT	CODE NUMBER
				2015-06-07	3:1 mm A001

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2015-06-07

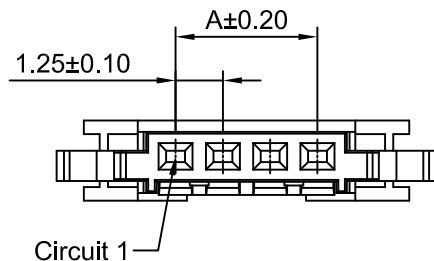

Ordering Information:

HDGC1254HA-XP - ***


1 2

1.Part No.

2.Material:

(blank): Nylon 66,UL94V-0

LCP: LCP,UL94V-0



Ordering Information & Dimensions

Circuits	Dimensions(mm)		
	A	B	C
2P	1.25	6.10	4.10
3P	2.50	7.35	5.35
4P	3.75	8.60	6.60
5P	5.00	9.85	7.85
6P	6.25	11.10	9.10
7P	7.50	12.35	10.35
8P	8.75	13.60	11.60
9P	10.00	14.85	12.85
10P	11.25	16.10	14.10
11P	12.50	17.35	15.35
12P	13.75	18.60	16.60
13P	15.00	19.85	17.85
14P	16.25	21.10	19.10
15P	17.50	22.35	20.35
16P	18.75	23.60	21.60
17P	20.00	24.85	22.85
18P	21.25	26.10	24.10
19P	22.50	27.35	25.35
20P	23.75	28.60	26.60
21P	25.00	29.85	27.85
22P	26.25	31.10	29.10
23P	27.50	32.35	30.35
24P	28.75	33.60	31.60
25P	30.00	34.85	32.85
26P	31.25	36.10	34.10
27P	32.50	37.35	35.35
28P	33.75	38.60	36.60
29P	35.00	39.85	37.85
30P	36.25	41.10	39.10

SPECIFICATIONS:

Current Rating: 1A AC,DC

Voltage Rating: 125V AC,DC

Temperature Range: -25°C ~ +85°C

Contact Resistance: 20mΩ Max.

Insulation Resistance: 100MΩ Min.

Withstanding Voltage: 500V AC/minute

Material: Nylon 66,UL94V-0(White)



深圳市华德共创科技有限公司


Shenzhen Huade co-create Technology Co.,LTD

TEL : 0755-27129737

FAX : 0755-29940187


-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表					TITLE: 产品名称: 1.25mm Pitch Housing				
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE	PART NO: 产品编号: HDGC1254HA-XP			
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG	DATE	SCALE	UNIT	CODE NUMBER
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG	2015-06-07	5:1	mm	A008

修订 REV	标记 MARK	修改摘要 REVISION DESCRIPTION	签名 SIGNATURE	日期 DATE
A0		NEW RELEASE	WANG	2015-06-07

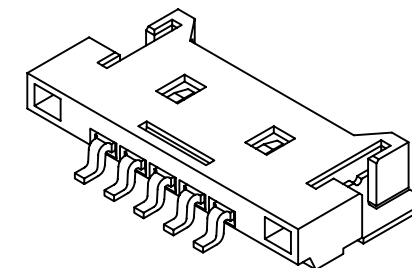

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	1.25	7.65	17P	20.00	26.40
3P	2.50	8.90	18P	21.25	27.65
4P	3.75	10.15	19P	22.50	28.90
5P	5.00	11.40	20P	23.75	30.15
6P	6.25	12.65	21P	25.00	31.40
7P	7.50	13.90	22P	26.25	32.65
8P	8.75	15.15	23P	27.50	33.90
9P	10.00	16.40	24P	28.75	35.15
10P	11.25	17.65	25P	30.00	36.40
11P	12.50	18.90	26P	31.25	37.65
12P	13.75	20.15	27P	32.50	38.90
13P	15.00	21.40	28P	33.75	40.15
14P	16.25	22.65	29P	35.00	41.40
15P	17.50	23.90	30P	36.25	42.65
16P	18.75	25.15			

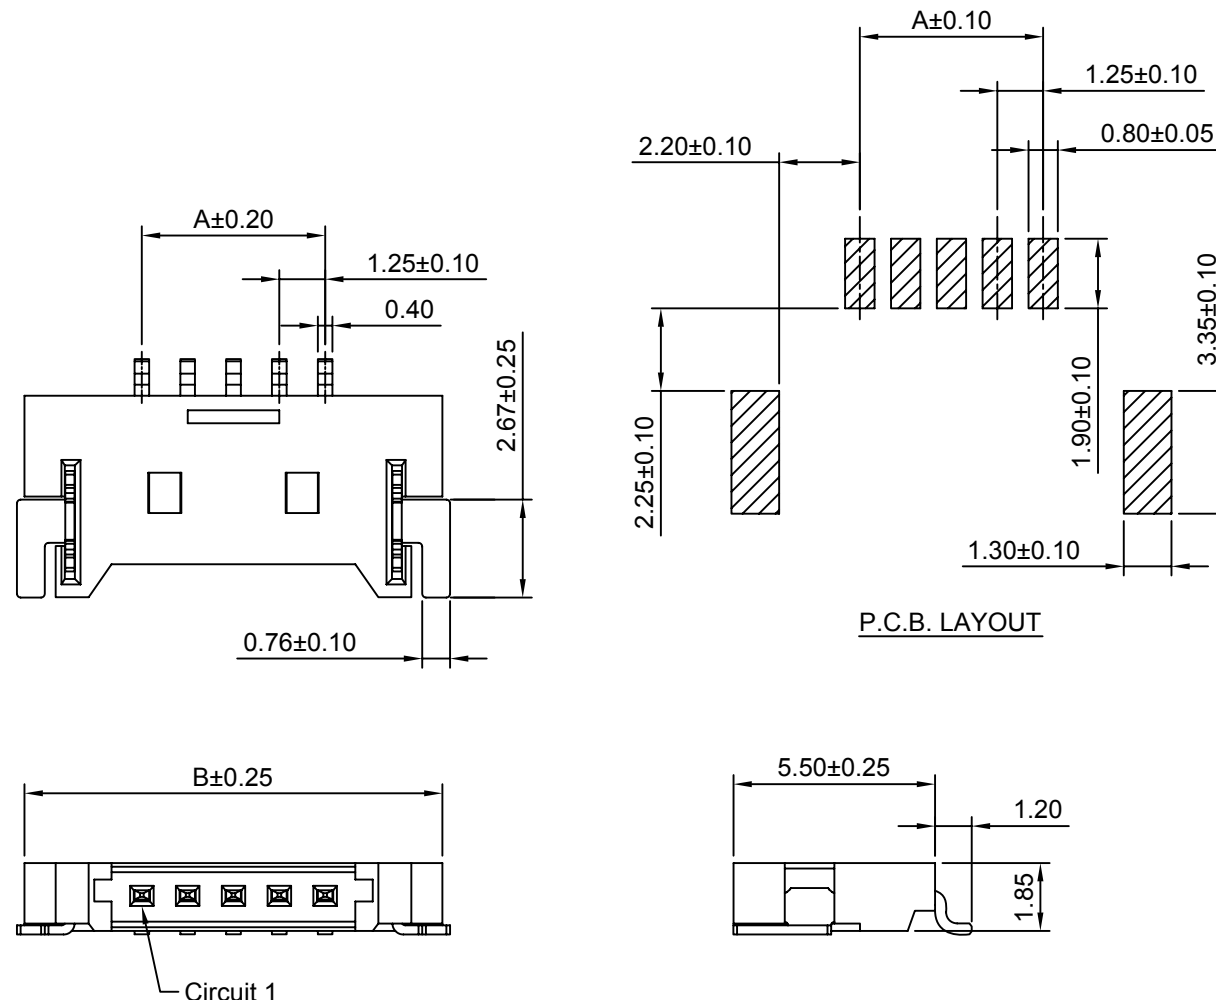

P.C.B. LAYOUT

SPECIFICATIONS:

Current Rating: 1A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 20mΩ Max.
Insulation Resistance: 100MΩ Min.
Withstanding Voltage: 500V AC/minute
Pin Material: Brass/Gold over Nickel
Solder Tabs: Brass/Tin over Nickel
Material: Nylon 6T, UL94V-0(Beige)

HDGC 深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co.,LTD
TEL : 0755-27129737 FAX : 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表				TITLE: 产品名称: 1.25mm Pitch 90° Wafer	
X.X	±0.30	X.X°	±3°	APPD: 核准:	XIE
X.XX	±0.30	X.XX°	±2°	CHECK: 校对:	WANG
X.XXX	±0.10	X.XXX°	±1°	DRAW: 绘图:	WANG
				PART NO: 产品编号:	HDGC1254WR-S-XP
				DATE	SCALE
				UNIT	CODE NUMBER
				2015-06-07	5:1 mm A012